

SRN110 – 110 lb Nugget Ice Machine

Brilliance® Under-Counter Nugget Ice Machine



Features

- 15" cabinet width, produces up to 110 lbs. of nugget ice in 24 hours
- Uses 40% less energy and more than 50% less water than gourmet cube ice machines
- Accepts custom wood panel to match surrounding cabinetry
- Approved for indoor or outdoor use
- Lighted bin
- Concealed door hinge system
- User-friendly control panel informs whether power is on, alerts a no-water condition, and time to clean reminder
- Available with built-in drain pump
- Field reversible door
- **Protected with AgION®, a silver-based antimicrobial compound molded into key ice machine components in order to guard internal surfaces between cleanings.**

24 Hour Ice Production & Storage Capacity

70°F/21°C Air 50°F/10°C Water lb / kg	90°F/32°C Air 70°F/21°C Water lb / kg	Bin Storage Capacity lb / kg
110 / 49.9	80 / 36.3	26 / 12

CERTIFIED
ISO
9001:2015

DESIGNED
ENGINEERED
ASSEMBLED
USA

ETL
c US
Intertek

agion
Nature's antimicrobial

Control Board



Scoop



- Units installed in elevations greater than 3,000 feet or 900 meters above sea level require an altitude adjustment to maintain proper ice level.



Nugget Ice



The Original Chewable Ice™.
Soft ice ideal for beverages
and blended drinks.

Warranty


- 2 years parts and labor on all components.
- 5 years parts on the compressor only.

Warranty valid in North America.

SRN110 – 110 lb Nugget Ice Machine

MACHINE SPECIFICATIONS

SRN110 – 110 lb Nugget Ice Machine

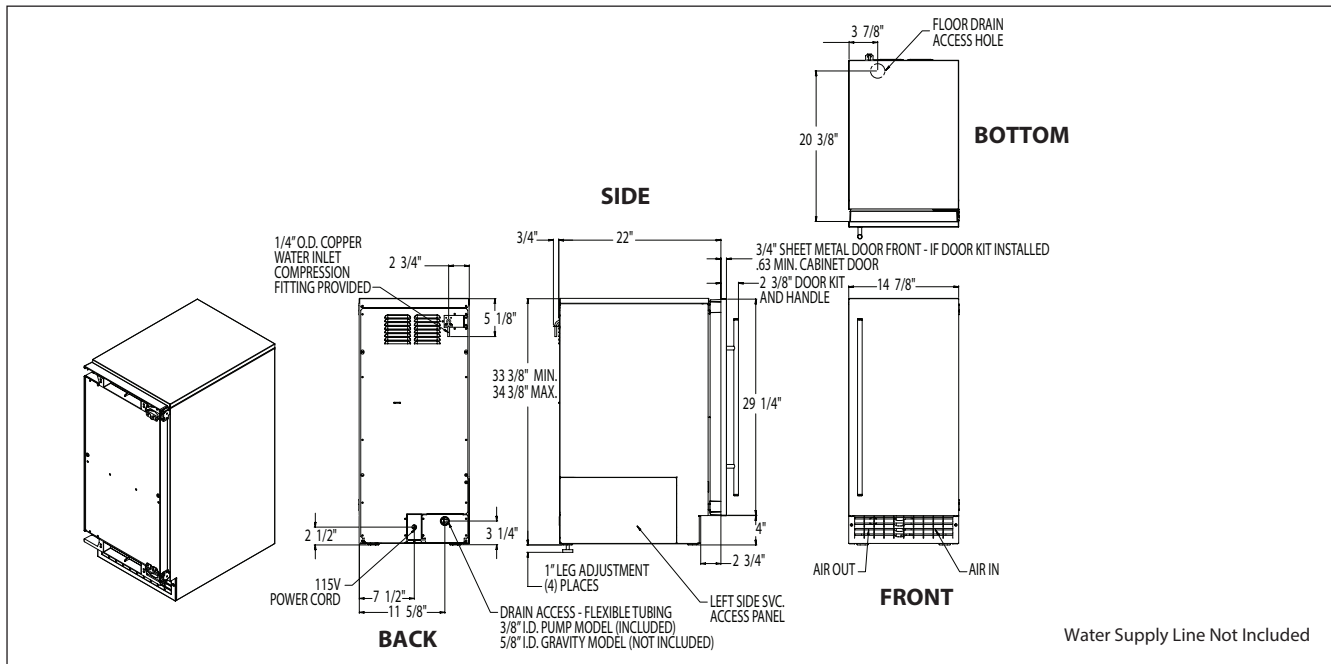

All Models

24 Hour Ice Production:
(70° Air/50° Water) 110 lb / 49.9 kg
(90° Air/70° Water) 80 lb / 36.2 kg

Bin Storage Capacity: 26 lb / 12 kg

Condenser Type: Air

Basic Electrical: 15a dedicated circuit required
(Volts/Hz/Phase) 115/60/1

Amps: 5


Refrigerant: R290

Dimensions (W x D x H):
Unit (without legs adjusted):
14.875" x 22" x 33.375"
(37.8 x 57.8 x 84.78 cm)

Shipping Carton: 18" x 28" x 38"
(45.7 x 71.1 x 96.5 cm)

Specifications

Model	Finish Cabinet / Front	Drain Type	Shipping Weight lb / kg
SRNG110A-1SU	Stainless Steel / Unfinished	Gravity	124 / 56
SRNG110A-1SS	Stainless Steel / Stainless Steel	Gravity	133 / 60
SRNP110A-1SU	Stainless Steel / Unfinished	Pump	129 / 59
SRNP110A-1SS	Stainless Steel / Stainless Steel	Pump	138 / 63

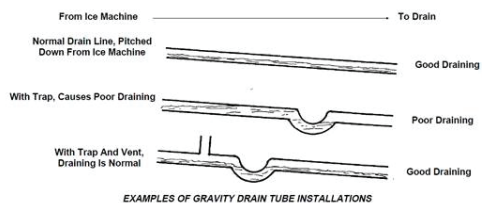

SRNG: Gravity flow drain tube
SRNP: Built-in pump to expel drain water
which includes 10' drain tube

Accessories

Model	Description	Shipping Weight lb / kg
KDFS	Stainless Steel Door Front Kit	12 / 5.5
KATB	Anti-Tip Bracket Kit	2 / 0.9
KDFR	Retro-Fit Door Front Kit	8 / 3.6
19-0664	Clear One Pre-Mixed Scale Remover	

Operating Requirements

	Minimum	Maximum
Air Temperatures	50°F (10°C)	100°F (38°C)
Water Temperatures	40°F (4.4°C)	90°F (38°C)
Water Pressures	20 PSIG (1 bar)	80 PSIG (5 bar)
Electrical Voltage	-10%	+10%

Machine requires voltage indicated on the rating nameplate. Scotsman SRC065 and SRN110 models are approved for outdoor installations. All products must operate where air temperature does not fall below 50°F and does not exceed 100°F. Extended periods of operation at temperatures exceeding these limitations constitute misuse under the terms of Scotsman Manufacturer's Limited Warranty, resulting in a loss of warranty coverage. Failures caused by improper installation are not considered factory defects. Refer to owner's manual for complete installation requirements. Please note: when installed in a corner, the door swing may be limited due to handle contact with the wall or cabinet face.

SRC065 – 65 lb Gourmet Clear Ice Machine

Brilliance™ Under-Counter Gourmet Ice Machine

SRC065 – 65 lb Gourmet Clear Ice Machine



Features

- 15" cabinet width
- Produces up to 65 lbs. of gourmet ice in 24 hours
- User-friendly control panel informs whether power is on, alerts a no-water condition, and time to clean reminder
- Uses less energy and water compared to 30 lb models
- Indoor & Outdoor rated
- Accepts custom wood panels to match existing cabinetry
- Lighted bin
- Concealed Door Hinge System
- Available with built-in drain pump
- Field reversible door

24 Hour Ice Production & Storage Capacity

70°F/21°C Air 50°F/10°C Water lb / kg	90°F/32°C Air 70°F/21°C Water lb / kg	Bin Storage Capacity lb / kg
65 / 29	49 / 22.2	26 / 12



Control Board



Water Sensor



Scoop



- Units installed in elevations greater than 6,000 feet or 1,800 meters above sea level require an altitude adjustment to maintain proper ice level.

Gourmet Clear Ice



Gourmet Cube
1" x 1½" x 1¼"
(2.54 x 2.86 x 3.18 cm)

Large, slow-melting ice form, ideal for mixed drinks.


Warranty

- 1 years parts and labor on all components.
- 5 years parts on the compressor only.

Warranty valid in North America.

MACHINE SPECIFICATIONS

SRC065 – 65 lb Gourmet Clear Ice Machine

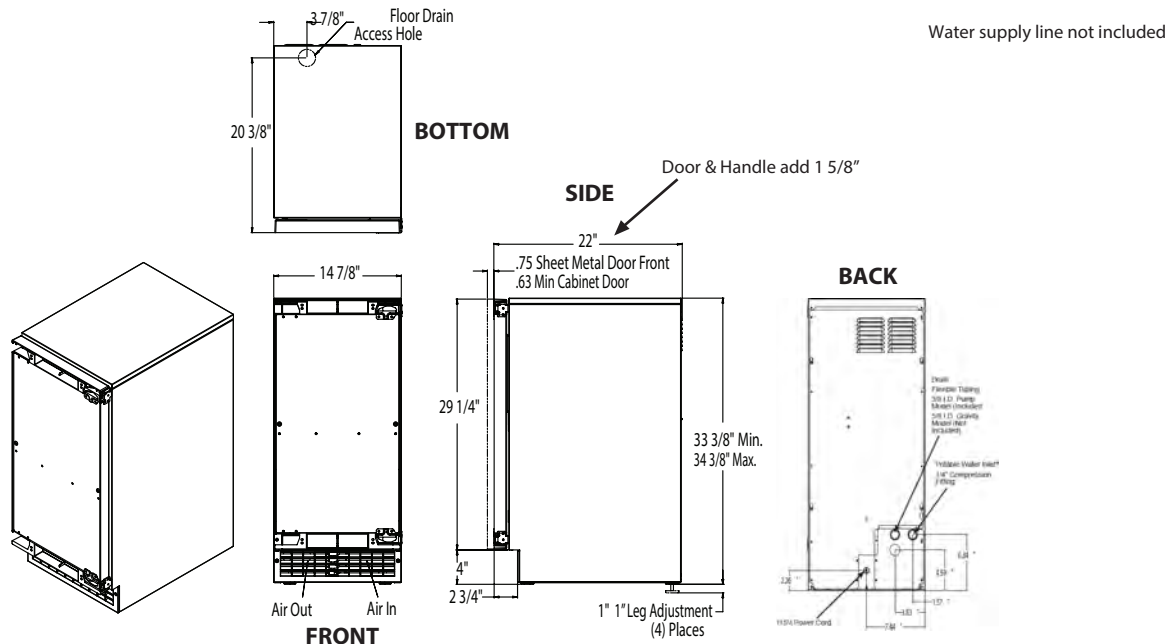

All Models

24 Hour Ice Production:
(70° Air/50° Water) 65 lb / 29 kg
(90° Air/70° Water) 49 lb / 22.2 kg

Bin Storage Capacity: 26 lb / 12 kg

Condenser Type: Air

Basic Electrical: 15a dedicated circuit required
(Volts/Hz/Phase) 115/60/1

Amps: 5

Maximum Fuse Size: 15


Refrigerant: R290

Dimensions (W x D x H):
Unit (without legs adjusted):
14.875" x 22" x 33.375"
(37.8 x 55.9 x 84.78 cm)

Shipping Carton:
18" x 28" x 38"
(45.7 x 71.1 x 96.5 cm)

Specifications

Model	Finish Cabinet / Front	Drain Type	Shipping Weight lb / kg
SRCG065A-1SU	Stainless Steel / Unfinished	Gravity	113 / 51
SRCP065A-1SU	Stainless Steel / Unfinished	Pump	118 / 54
SRCG065A-1SS	Stainless Steel / Stainless Steel	Gravity	122 / 55
SRCP065A-1SS	Stainless Steel / Stainless Steel	Pump	127 / 58

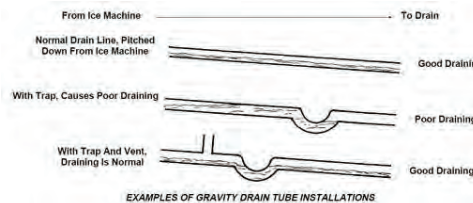

SRCP: Built-in pump to expel drain water
which includes 10' drain tube

Accessories

Accessories		Shipping Weight lb / kg
Model	Description	
KDFS	Stainless Steel Door Front Kit	12 / 5.5
KSSKP	Stainless Steel Kick Plate Cover	5 / 2.26
KATB	Anti-Tip Bracket Kit	2 / 0.9
KDFR	Retro-Fit Door Front Kit	8 / 3.6
19-0653	Clear One Concentrated Scale Remover	

Operating Requirements

	Minimum	Maximum
Air Temperatures	50°F (10°C)	100°F (38°C)
Water Temperatures	40°F (4.4°C)	100°F (38°C)
Water Pressures	20 PSIG (1 bar)	80 PSIG (5 bar)
Electrical Voltage	-10%	+10%

Machine requires voltage indicated on the rating nameplate. Scotsman SRC065 and SRN110 models are approved for outdoor installations. All products must operate where air temperature does not fall below 50°F and does not exceed 100°F. Extended periods of operation at temperatures exceeding these limitations constitute misuse under the terms of Scotsman Manufacturer's Limited Warranty, resulting in a loss of warranty coverage. Failures caused by improper installation are not considered factory defects. Refer to owner's manual for complete installation requirements. Please note: when installed in a corner, the door swing may be limited due to handle contact with the wall or cabinet face.

SRC035 – 35 lb Gourmet Clear Ice Machine

Brilliance™ Under-Counter Gourmet Ice Machine



Features

- 15" cabinet width
- Produces up to 35 lbs. of gourmet ice in 24 hours
- Comes with unfinished front panel which can be finished with locally supplied custom wood front panel or Scotsman® front panel stainless steel kit KDFS
- Articulating door hinge system
- Available with built-in drain pump
- Field reversible door

INDOOR ONLY

24 Hour Ice Production & Storage Capacity

70°F/21°C Air 50°F/10°C Water lb / kg	90°F/32°C Air 70°F/21°C Water lb / kg	Bin Storage Capacity lb / kg
35 / 15.9	16 / 7.2	26 / 12

- Units installed in regions of extreme weather conditions may not reach production capacities.
- Units installed in elevations greater than 6,000 feet or 1,800 meters above sea level require an altitude adjustment to maintain proper ice level.



Gourmet Clear Ice



Gourmet Cube
1" x 1 1/8" x 1 1/4"
(2.54 x 2.86 x 3.18 cm)

Large, slow-melting ice form, ideal for mixed drinks.

Warranty


- 1 years parts and labor on all components.
- 5 years parts on the compressor only.

Warranty valid in North America.

SRC035 – 35 lb Gourmet Clear Ice Machine

MACHINE SPECIFICATIONS

SRC035 - 35 lb Gourmet Clear Ice Machine

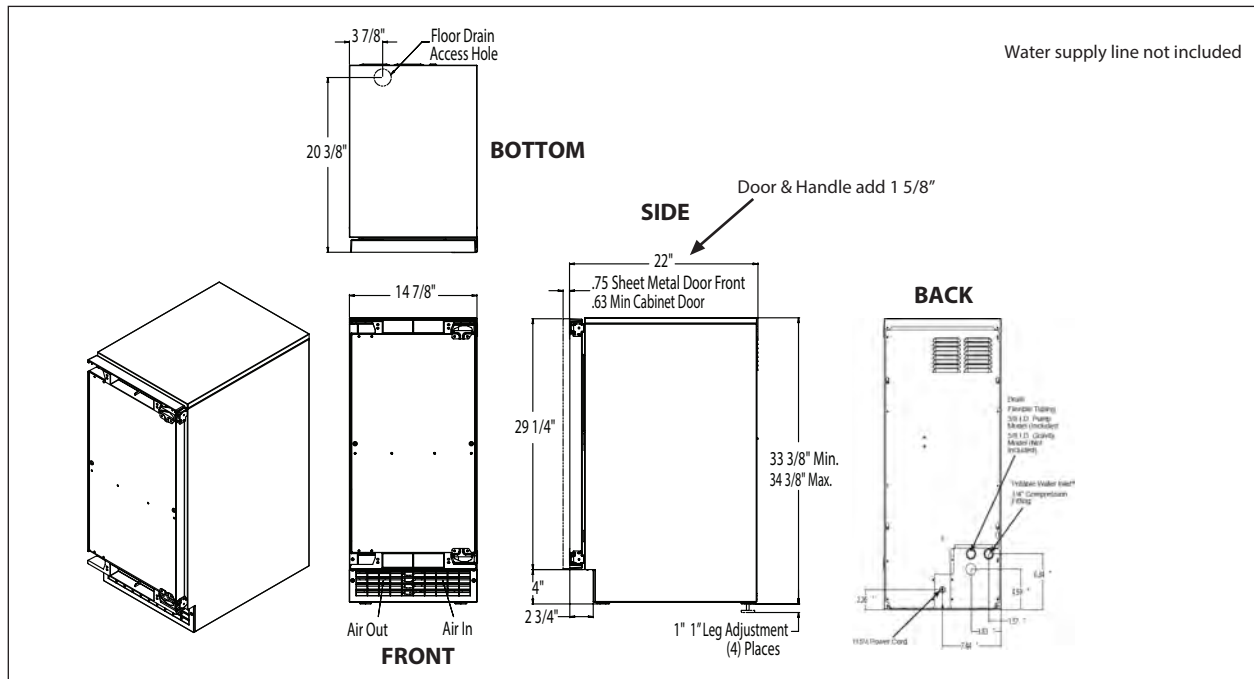

All Models

24 Hour Ice Production:
(70° Air/50° Water) 35 lb / 15.9 kg
(90° Air/70° Water) 16 lb / 7.2 kg

Bin Storage Capacity: 26 lb / 12 kg

Condenser Type: Air

Basic Electrical: (Volts/Hz/Phase)	15a dedicated circuit required 115/60/1
---------------------------------------	---

Amps: 5

Maximum Fuse Size: 15


Refrigerant: R290

Dimensions (W x D x H):
Unit (without legs):
14.875" x 22" x 33.375"
(37.8 x 55.9 x 84.78 cm)

Shipping Carton:
18" x 28" x 38"
(45.7 x 71.1 x 96.5 cm)

Specifications

	Specifications			Shipping Weight lb / kg
	Model	Finish Cabinet / Front	Drain Type	
Indoor	SRCG035A-1SU	Stainless Steel / Unfinished	Gravity	113 / 51
	SRCP035A-1SU	Stainless Steel / Unfinished	Pump	118 / 54

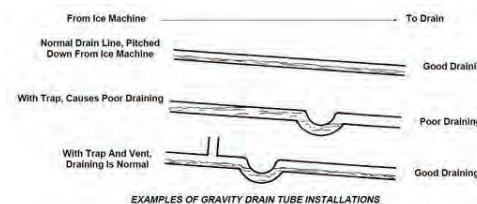

SRCP: Built-in pump to expel drain water
which includes 10' drain tube

Accessories

Model	Description	Shipping Weight lb / kg
KDFS	Stainless Steel Door Front Kit	12 / 5.5
KSSKP	Stainless Steel Kick Plate Cover	5 / 2.26
KATB	Anti-Tip Bracket Kit	2 / 0.9
KDFR	Retro-Fit Door Front Kit	8 / 3.6
19-0653	Clear One Concentrated Scale Remover	

Operating Requirements

	Minimum	Maximum
Air Temperatures	50°F (10°C)	100°F (38°C)
Water Temperatures	40°F (4.4°C)	100°F (38°C)
Water Pressures	20 PSIG (1 bar)	80 PSIG (5 bar)
Electrical Voltage	-10%	+10%

Machine requires voltage indicated on the rating nameplate. Scotsman SRC065 and SRN110 models are approved for outdoor installations. All products must operate where air temperature does not fall below 50°F and does not exceed 100°F. Extended periods of operation at temperatures exceeding these limitations constitute misuse under the terms of Scotsman Manufacturer's Limited Warranty, resulting in a loss of warranty coverage. Failures caused by improper installation are not considered factory defects. Refer to owner's manual for complete installation requirements. Please note: when installed in a corner, the door swing may be limited due to handle contact with the wall or cabinet face.

DRC033 - 30 lb Gourmet Clear Ice Machine

Legacy Under-Counter Gourmet Ice Machine



Features

- 15" cabinet width
- Produces up to 30 lbs. of gourmet ice in 24 hours
- Maintains ideal bin capacity with automatic shut-off and restart
- Accepts custom wood panels to match your decor
- Aluminum door with brushed stainless steel finish and matching exposed door frame
- Available with built-in drain pump
- Available in stainless steel finish only
- Field reversible door
- Stainless wrap-around door with towel bar handle available as an accessory (KSS model)

INDOOR ONLY

24 Hour Ice Production & Storage Capacity

70°F/21°C Air 50°F/10°C Water lb / kg	90°F/32°C Air 70°F/21°C Water lb / kg	Bin Storage Capacity lb / kg
30 / 13.6	16 / 7.2	26 / 12

- Units installed in regions of extreme weather conditions may not reach production capacities.
- Units installed in elevations greater than 6,000 feet or 1,800 meters above sea level require an altitude adjustment to maintain proper ice level.



Gourmet Clear Ice



Gourmet Cube
1" x 1 1/8" x 1 1/4"
(2.54 x 2.86 x 3.18 cm)

Large, slow-melting ice form, ideal for beverages.

Warranty


- 1 years parts and labor on all components.
- 5 years parts on the compressor only.

Warranty valid in North America.

DRC033 - 30 lb Gourmet Clear Ice Machine

MACHINE SPECIFICATIONS

DRC033 – 30 lb Gourmet Clear Ice Machine

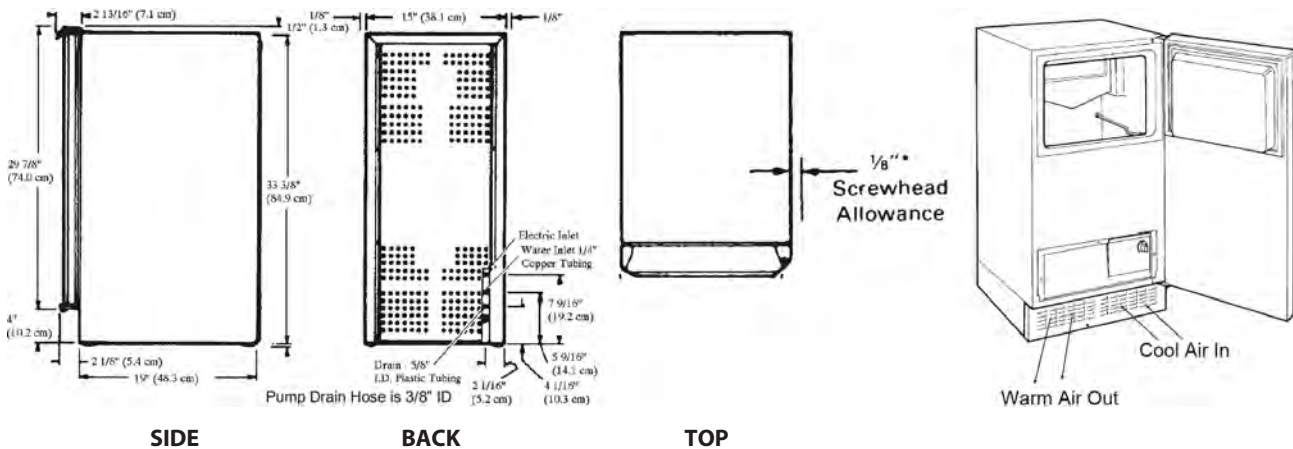

- Water supply line not included.
- Pump model: 3/8" drain line "included"
- Gravity model: 5/8" drain line "yield supplied"

All Models

24 Hour Ice Production:
(70° Air/50° Water) 30 lb / 13.6 kg
(90° Air/70° Water) 16 lb / 7.2 kg

Bin Storage Capacity: 26 lb / 12 kg

Condenser Type: Air

Basic Electrical: 15a dedicated circuit required
(Volts/Hz/Phase) 115/60/1

Amps: 3.6

Maximum Fuse Size: 15


Refrigerant: R290

Dimensions (W x D x H):
Unit (without legs adjusted):
15" x 22.8125" x 33.875"
(38.1 x 57.94 x 86.04 cm)

Shipping Carton: 18" x 28" x 38"
(45.7 x 71.1 x 96.5 cm)

Specifications

	Model	Finish Cabinet / Front	Drain Type	Shipping Weight lb / kg
Indoor	DRCG033A-1SS	Stainless Steel / Aluminum	Gravity	83 / 38
	DRCP033A-1SS	Stainless Steel / Aluminum	Pump	88 / 40

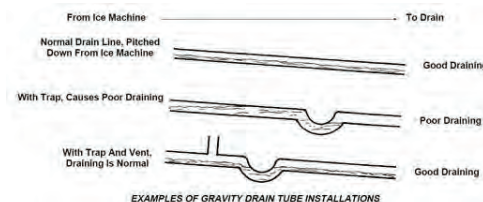

EXAMPLES OF GRAVITY DRAIN TUBE INSTALLATIONS

DRCG033A-1SS: Gravity flow drain tube
DRCP033A-1SS: Built-in pump to expel
drain water which includes 10' drain tube

Accessories

Model	Description	Shipping Weight lb / kg
KHAND	Custom Handle Trim Piece (Top)	1 / 0.45
KSS	Wrap Around Stainless Steel Door Sleeve Kit	12 / 5.5
SS-33	Stainless Steel Front Panel Kit	9/4
19-0653	Clear One Concentrated Scale Remover	

Operating Requirements

	Minimum	Maximum
Air Temperatures	50°F (10°C)	100°F (38°C)
Water Temperatures	40°F (4.4°C)	100°F (38°C)
Water Pressures	20 PSIG (1.4 bar)	80 PSIG (5.5 bar)
Electrical Voltage	-10%	+10%

Machine requires voltage indicated on the rating nameplate. Scotsman SRC065 and SRN110 models are approved for outdoor installations. All products must operate where air temperature does not fall below 50°F and does not exceed 100°F. Extended periods of operation at temperatures exceeding these limitations constitute misuse under the terms of Scotsman Manufacturer's Limited Warranty, resulting in a loss of warranty coverage. Failures caused by improper installation are not considered factory defects. Refer to owner's manual for all installation requirements. Please note: when installed in a corner, the door swing may be limited due to handle contact with the wall or cabinet face.