

Brilliance™ Under-Counter Gourmet Ice Machine



Features

- 15" cabinet width
- Produces up to 65 lbs. of gourmet ice in 24 hours
- User-friendly control panel informs whether power is on, alerts a no-water condition, and a time to clean reminder
- Uses less energy and water compared to 30 lb models
- Indoor & Outdoor rated
- Accepts custom wood panels to match existing cabinetry
- LED illuminated bin
- Articulating hinge system
- Available with built-in drain pump
- Field reversible door

24 Hour Ice Production & Storage Capacity

70°F/21°C Air 50°F/10°C Water lb / kg	90°F/32°C Air 70°F/21°C Water lb / kg	Bin Storage Capacity lb / kg
65 / 30	48 / 22	26 / 12



Control Board



Water Sensor



Scoop



Gourmet Clear Ice




Gourmet Cube
1" x 1½" x 1¼"
(2.54 x 2.86 x 3.18 cm)

Large, slow-melting ice form, ideal for mixed drinks.

Warranty

- 1 years parts and labor on all components.
- 5 years parts on the compressor only.

Warranty valid in North America.

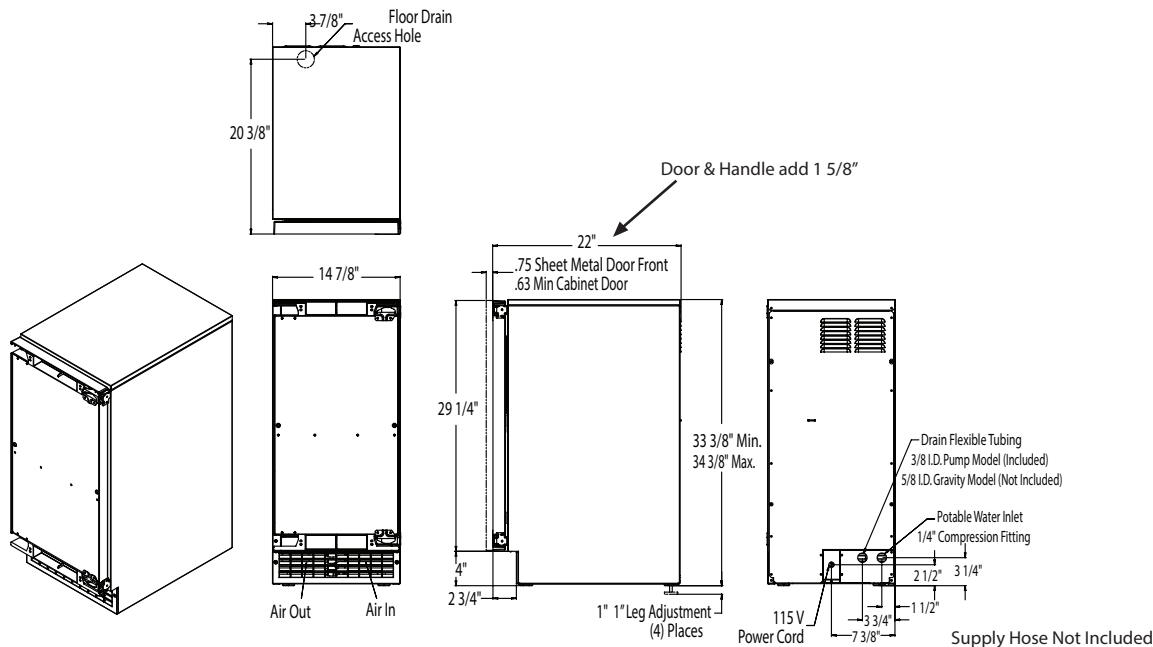

All Models

24 Hour Ice Production:
(70 deg. Air/50 deg. Water)
65 lb / 30 kg

(90 deg. Air / 70 Deg. Water)
50 lb / 23 kg

Bin Storage Capacity:
26 lb / 12 kg

Condenser Type:
Air

Basic Electrical:
(Volts/Hz/Phase)
15a dedicated circuit is required
115/60/1

Amps:
5

Maximum Fuze Size:
15

Refrigerant:
R-134A

Dimensions (W x D x H):
Unit (without legs adjusted):
14.875" x 22" x 33.375"
(37.8 x 55.9 x 84.78 cm)

Shipping Carton:
18" x 28" x 38"
(45.7 x 71.1 x 96.5 cm)

Specifications

Model	Finish Cabinet / Front	Drain Type	Shipping Weight lb / kg
SCCG50MB-1SU	Stainless Steel / Unfinished	Gravity	113 / 51
SCCP50MB-1SU	Stainless Steel / Unfinished	Pump	118 / 54
SCCG50MB-1SS	Stainless Steel / Stainless Steel	Gravity	122 / 55
SCCP50MB-1SS	Stainless Steel / Stainless Steel	Pump	127 / 58

From Ice Machine To Drain

Normal Drain Line, Pitched Down From Ice Machine Good Draining

With Trap, Causes Poor Draining Poor Draining

With Trap And Vent, Draining Is Normal Good Draining

EXAMPLES OF GRAVITY DRAIN TUBE INSTALLATIONS

SCCG: Gravity flow drain tube
SCCP: Built-in pump to expel drain water which includes 10' drain tube

Accessories

Model	Description	Shipping Weight lb / kg
KDFS	Stainless Steel Door Front Kit	12 / 5.5
KSSKP	Stainless Steel Kick Plate Cover	5 / 2.26
KATB	Anti-Tip Bracket Kit	2 / 0.9
KDFR	Retro-Fit Door Front Kit	8 / 3.6

Operating Requirements

	Minimum	Maximum
Air Temperatures	50°F (10°C)	100°F (38°C)
Water Temperatures	40°F (4.4°C)	100°F (38°C)
Water Pressures	20 PSIG (1 bar)	80 PSIG (5 bar)
Electrical Voltage	-10%	+10%

Machine requires voltage indicated on rating name plate.
Failures caused by improper voltage are not considered factory defects.
Scotsman products, except model SCCG50MB-1SS & SCCP50MB-1SS, SCN60 are not designed for outdoor installations nor for installation where air temperatures fall below 50°F. or exceed 100°F., nor where water temperatures fall below 40°F. or exceed 100°F. Extended periods of operation at temperatures exceeding these limitations constitute misuse under the terms of Scotsman Manufacturer's Limited Warranty, resulting in a loss of warranty coverage. Refer to owner's manual for all installation requirements.
Please note: when installed in a corner, the door swing may be limited due to handle contact with the wall or cabinet face.