

## MACHINE SPECIFICATIONS

### SRC065 – 65 lb Gourmet Clear Ice Machine

#### Brilliance™ Under-Counter Gourmet Ice Machine



#### Features

- 15" cabinet width
- Produces up to 65 lbs. of gourmet ice in 24 hours
- User-friendly control panel informs whether power is on, alerts a no-water condition, and time to clean reminder
- Uses less energy and water compared to 30 lb models
- Indoor & Outdoor rated
- Accepts custom wood panels to match existing cabinetry
- Lighted bin
- Concealed Door Hinge System
- Available with built-in drain pump
- Field reversible door

#### 24 Hour Ice Production & Storage Capacity

70°F/21°C Air 50°F/10°C Water lb / kg	90°F/32°C Air 70°F/21°C Water lb / kg	Bin Storage Capacity lb / kg
65 / 29	49 / 22.2	26 / 12

**Control Board**



**Water Sensor**



**Scoop**



- Units installed in elevations greater than 6,000 feet or 1,800 meters above sea level require an altitude adjustment to maintain proper ice level.



#### Gourmet Clear Ice



Large, slow-melting ice form, ideal for mixed drinks.

#### Warranty

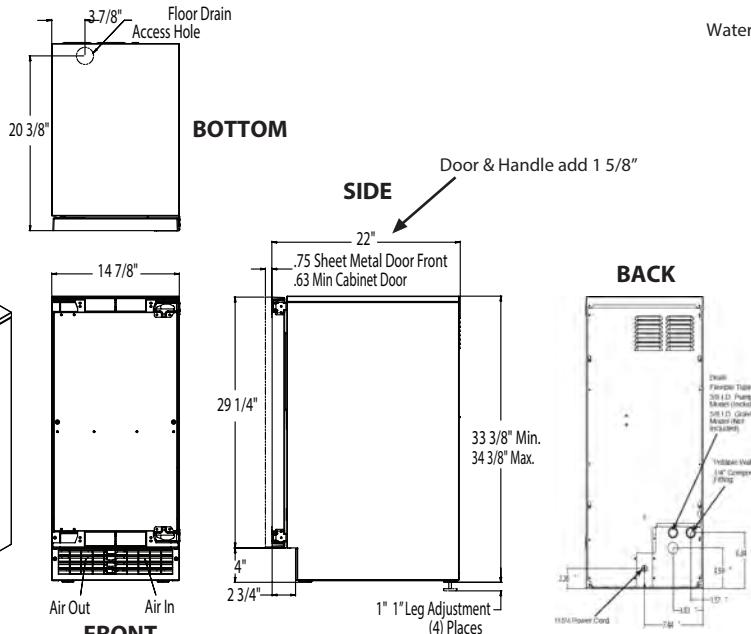
- 1 years parts and labor on all components.
- 5 years parts on the compressor only.

Warranty valid in North America.

### SRC065 – 65 lb Gourmet Clear Ice Machine

## MACHINE SPECIFICATIONS

# SRC065 – 65 lb Gourmet Clear Ice Machine

 <p><b>BOTTOM</b></p> <p><b>SIDE</b></p> <p><b>FRONT</b></p> <p><b>BACK</b></p> <p>Water supply line not included</p>																																							
<p><b>All Models</b></p> <p>24 Hour Ice Production:            (70° Air/50° Water) 65 lb / 29 kg            (90° Air/70° Water) 49 lb / 22.2 kg</p> <p>Bin Storage Capacity: 26 lb / 12 kg</p> <p>Condenser Type: Air</p> <p>Basic Electrical: 15a dedicated circuit required            (Volts/Hz/Phase) 115/60/1</p> <p>Amps: 5</p> <p>Maximum Fuse Size: 15</p> <p>Refrigerant: R290</p> <p>Dimensions (W x D x H):            Unit (without legs adjusted):            14.875" x 22" x 33.375"            (37.8 x 55.9 x 84.78 cm)</p> <p>Shipping Carton:            18" x 28" x 38"            (45.7 x 71.1 x 96.5 cm)</p>	<p><b>Specifications</b></p> <table border="1"> <thead> <tr> <th>Model</th> <th>Finish Cabinet / Front</th> <th>Drain Type</th> <th>Shipping Weight lb / kg</th> </tr> </thead> <tbody> <tr> <td>SRCG065A-ISU</td> <td>Stainless Steel / Unfinished</td> <td>Gravity</td> <td>113 / 51</td> </tr> <tr> <td>SRCP065A-ISU</td> <td>Stainless Steel / Unfinished</td> <td>Pump</td> <td>118 / 54</td> </tr> <tr> <td>SRCG065A-ISS</td> <td>Stainless Steel / Stainless Steel</td> <td>Gravity</td> <td>122 / 55</td> </tr> <tr> <td>SRCP065A-ISS</td> <td>Stainless Steel / Stainless Steel</td> <td>Pump</td> <td>127 / 58</td> </tr> </tbody> </table> <p>From Ice Machine ————— To Drain</p> <p>Normal Drain Line, Pitched Down From Ice Machine ————— Good Draining</p> <p>With Trap, Causes Poor Draining ————— Poor Draining</p> <p>With Trap And Vent, Draining Is Normal ————— Good Draining</p> <p>EXAMPLES OF GRAVITY DRAIN TUBE INSTALLATIONS</p> <p>SRCG: Gravity flow drain tube            SRCP: Built-in pump to expel drain water which includes 10' drain tube</p> <p><b>Accessories</b></p> <table border="1"> <thead> <tr> <th>Model</th> <th>Description</th> <th>Shipping Weight lb / kg</th> </tr> </thead> <tbody> <tr> <td>KDFS</td> <td>Stainless Steel Door Front Kit</td> <td>12 / 5.5</td> </tr> <tr> <td>KSSKP</td> <td>Stainless Steel Kick Plate Cover</td> <td>5 / 2.26</td> </tr> <tr> <td>KATB</td> <td>Anti-Tip Bracket Kit</td> <td>2 / 0.9</td> </tr> <tr> <td>KDFR</td> <td>Retro-Fit Door Front Kit</td> <td>8 / 3.6</td> </tr> <tr> <td>19-0653</td> <td>Clear One Concentrated Scale Remover</td> <td></td> </tr> </tbody> </table>	Model	Finish Cabinet / Front	Drain Type	Shipping Weight lb / kg	SRCG065A-ISU	Stainless Steel / Unfinished	Gravity	113 / 51	SRCP065A-ISU	Stainless Steel / Unfinished	Pump	118 / 54	SRCG065A-ISS	Stainless Steel / Stainless Steel	Gravity	122 / 55	SRCP065A-ISS	Stainless Steel / Stainless Steel	Pump	127 / 58	Model	Description	Shipping Weight lb / kg	KDFS	Stainless Steel Door Front Kit	12 / 5.5	KSSKP	Stainless Steel Kick Plate Cover	5 / 2.26	KATB	Anti-Tip Bracket Kit	2 / 0.9	KDFR	Retro-Fit Door Front Kit	8 / 3.6	19-0653	Clear One Concentrated Scale Remover	
Model	Finish Cabinet / Front	Drain Type	Shipping Weight lb / kg																																				
SRCG065A-ISU	Stainless Steel / Unfinished	Gravity	113 / 51																																				
SRCP065A-ISU	Stainless Steel / Unfinished	Pump	118 / 54																																				
SRCG065A-ISS	Stainless Steel / Stainless Steel	Gravity	122 / 55																																				
SRCP065A-ISS	Stainless Steel / Stainless Steel	Pump	127 / 58																																				
Model	Description	Shipping Weight lb / kg																																					
KDFS	Stainless Steel Door Front Kit	12 / 5.5																																					
KSSKP	Stainless Steel Kick Plate Cover	5 / 2.26																																					
KATB	Anti-Tip Bracket Kit	2 / 0.9																																					
KDFR	Retro-Fit Door Front Kit	8 / 3.6																																					
19-0653	Clear One Concentrated Scale Remover																																						
<p><b>Operating Requirements</b></p> <table border="1"> <thead> <tr> <th></th> <th>Minimum</th> <th>Maximum</th> </tr> </thead> <tbody> <tr> <td>Air Temperatures</td> <td>50°F (10°C)</td> <td>100°F (38°C)</td> </tr> <tr> <td>Water Temperatures</td> <td>40°F (4.4°C)</td> <td>100°F (38°C)</td> </tr> <tr> <td>Water Pressures</td> <td>20 PSIG (1 bar)</td> <td>80 PSIG (5 bar)</td> </tr> <tr> <td>Electrical Voltage</td> <td>-10%</td> <td>+10%</td> </tr> </tbody> </table>		Minimum	Maximum	Air Temperatures	50°F (10°C)	100°F (38°C)	Water Temperatures	40°F (4.4°C)	100°F (38°C)	Water Pressures	20 PSIG (1 bar)	80 PSIG (5 bar)	Electrical Voltage	-10%	+10%	<p>Machine requires voltage indicated on the rating nameplate. Scotsman SRC065 and SRN110 models are approved for outdoor installations. All products must operate where air temperature does not fall below 50°F and does not exceed 100°F. Extended periods of operation at temperatures exceeding these limitations constitute misuse under the terms of Scotsman Manufacturer's Limited Warranty, resulting in a loss of warranty coverage. Failures caused by improper installation are not considered factory defects. Refer to owner's manual for complete installation requirements. Please note: when installed in a corner, the door swing may be limited due to handle contact with the wall or cabinet face.</p>																							
	Minimum	Maximum																																					
Air Temperatures	50°F (10°C)	100°F (38°C)																																					
Water Temperatures	40°F (4.4°C)	100°F (38°C)																																					
Water Pressures	20 PSIG (1 bar)	80 PSIG (5 bar)																																					
Electrical Voltage	-10%	+10%																																					