


# Cabinet Cut-Out Guidelines


## Cabinet Cut-Out Guidelines

### Brilliance Under-Counter Gourmet Ice Machine

#### Machine Dimensions

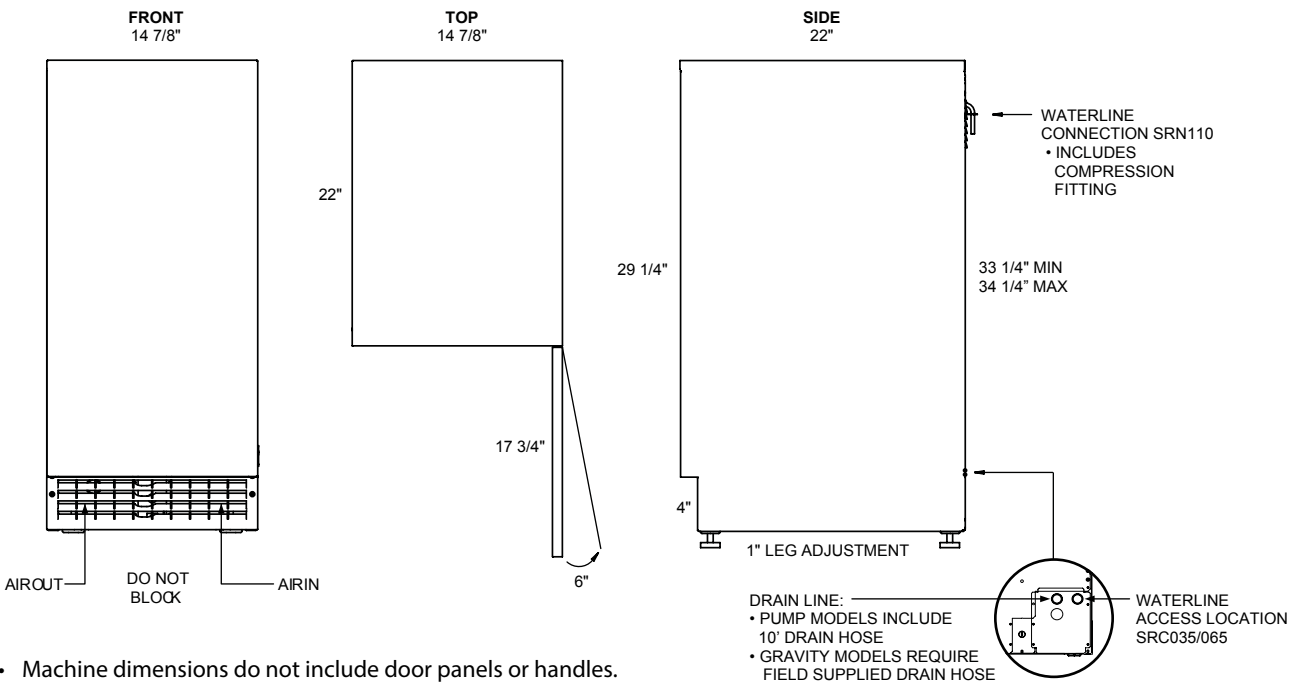

#### Opening Dimensions

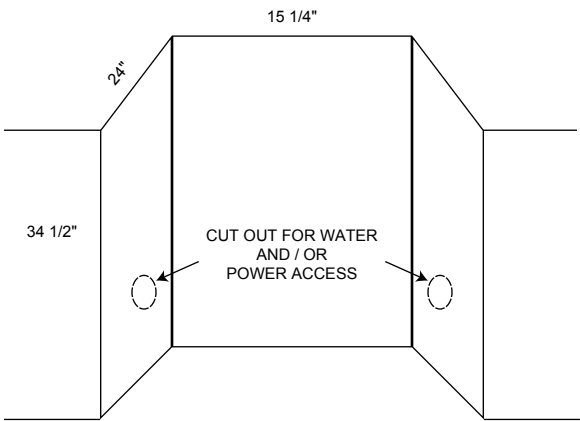

- Floor drain for gravity units must be within 4' of the machine.
- No additional clearance is needed for ventilation.
- Water shut off in adjacent cabinet recommended.

#### SPECIFICATIONS

WIDTH	14 7/8"
DEPTH	22"
HEIGHT	33 1/4" - 34 1/4"
OPENING WIDTH	15 1/4"
OPENING DEPTH	24"
OPENING HEIGHT	34 1/4"
HINGE WEIGHT CAPACITY	15 LBS
PANEL THICKNESS	5/8" - 3/4"

#### Installation Notes

- Do not kink drain line or place excess hose inside machine.
- Do not obstruct kickplate with any type of custom toe kick or oversized door panel.
- Unit should be on a dedicated circuit.
- GFCI outlet not recommended for indoor models and may cause product malfunctions.